FSC 5950

COMMERCIAL ITEM DESCRIPTION

INDUCTOR, POWER, SURFACE MOUNT


The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

- 1. SCOPE. This CID covers the general requirements for an inductor. Inductors covered by this CID are intended for commercial/industrial applications.
- 2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

- 3. SALIENT CHARACTERISTICS.
- 3.1 Interface and physical dimensions. Inductors supplied to this CID shall be as specified herein. (see figure 1).
- 3.2. Electrical characteristics. The electrical characteristics shall be as specified in table I.
- 3.3 Weight. The weight shall be no greater than 1.4 gram maximum.
- 3.4 Operating temperature range. The operating temperature range is -40°C to +85°C.
- 3.5 Temperature rise. DC current rating for a 40°C rise.
- 3.6 Altitude. The maximum altitude is 70,000 feet.
- 3.7 Marking. Inductors supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Beneficial comments recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0557, or facsimile (FAX) (614) 692-6939.

AMSC N/A

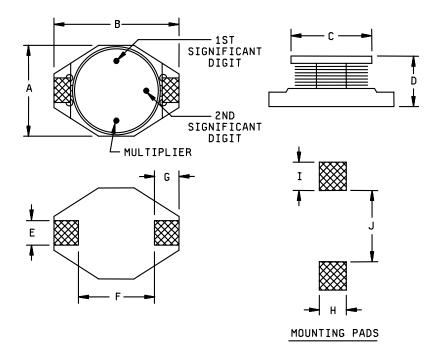

Dimension	Inches	mm	Dimension	Inches	mm
Α	.370 Max	9.40 Max	F	.300	7.62
В	.510 Max	12.95 Max	G	.100	2.54
С	.330 Dia	8.38 Dia	Н	.110	2.79
D	.205 Max	5.21 Max	I	.115	2.92
Е	.100	2.54	J	.290	7.37

NOTES:

- 1. Dimensions are in Inches.
- 2. Metric equivalents (in parenthesis) are listed for general information only.

FIGURE 1. Configuration and dimensions.

TABLE I. Electrical characteristics.

CID dash number	L ±20%	DCR Max	SRF typ	Isat	Irms
AA59737-	(μΗ)	(Ohms)	(MHz)	(A)	(A rms)
001	1.0	.009	100	9.0	6.8
002	1.5	.010	90	8.0	6.4
003	2.2	.012	80	7.0	6.1
004	3.3	.015	65	6.4	5.4
005	4.7	.018	45	5.4	4.8
006	6.8	.027	38	4.6	4.4
007	10	.038	30	3.8	3.9
800	15	.046	27	3.0	3.1
009	22	.085	19	2.6	2.7
010	33	.10	15	2.0	2.1
011	47	.14	12	1.6	1.8
012	68	.20	10	1.4	1.5
013	100	.28	9	1.2	1.3
014	150	.40	6	1.0	1.0
015	220	.61	5	.8	.8
016	330	1.02	4.5	.6	.6
017	470	1.27	3.5	.5	.5
018	680	2.02	2.5	.4	.4
019	1000	3.00	2.0	.3	.3

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

- 5.1 <u>Product conformance</u>. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.
- 5.2 <u>Market acceptance</u>. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:
 - a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.
 - b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 2 years.

- 6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.
- 7. NOTES.
- 7.1 <u>PIN</u>. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.
- 7.2 <u>Commercial and Government Entity (CAGE) code</u>. For ordering purposes, inventory control, and submission of these inductors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.
- 7.3 Source of documents. This section is not applicable to this CID.
- 7.4 Ordering data. The contract or order should specify the following:
 - a. CID document number, revision, and CID PIN.
 - b. Product conformance provisions.
 - c. Packaging requirements.
- 7.5 <u>Commercial products</u>. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE MFR's name and address

02113 Coilcraft Inc

1102 Silver Lake Road Cary, Illinois 60013-1658 Phone number (847) 639-2361

Uniform Resource Locator (URL): www.coilcraft.com

7.6 <u>Part number (P/N) supersession data</u>. This CID supersedes the following manufacturers' P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE II. P/N supersession data.

	 		
CID dash number	Vendor commercial PIN		
(see table I)	CAGE 02113		
AA59737-	<u>1</u> /		
001	DO3316P-102		
002	DO3316P-152		
003	DO3316P-222		
004	DO3316P-332		
005	DO3316P-472		
006	DO3316P-682		
007	DO3316P-103		
800	DO3316P-153		
009	DO3316P-223		
010	DO3316P-333		
011	DO3316P-473		
012	DO3316P-683		
013	DO3316P-104		
014	DO3316P-154		
015	DO3316P-224		
016	DO3316P-334		
017	DO3316P-474		
018	DO3316P-684		
019	DO3316P-105		

^{1/} The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

7.7 <u>Government users</u>. To acquire information on obtaining these inductors from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CPAA, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7741.

MILITARY INTERESTS: CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Custodians:

Navy - EC Preparing Activity:

DLA - CC

Project 5950-1151